

Solutions ...

Fibers and Textiles

April 2010

On-target products.
On-time delivery.

Service you
can count on.


Our company



INEOS Olefins & Polymers, one of the world's largest polyolefin producers, provides our customers with quality products and services from facilities that meet the highest Health, Safety, Security and Environmental (HSSE) standards. We are challenging ourselves to change the way our industry does business, and we are unleashing the potential of our people to provide our customers *On-target products. On-time delivery, Service you can count on.*

Our products

Our industry leading polymers are transformed into a wide variety of articles, including food and drink containers, caps and closures, film, pipe and a variety of other applications.

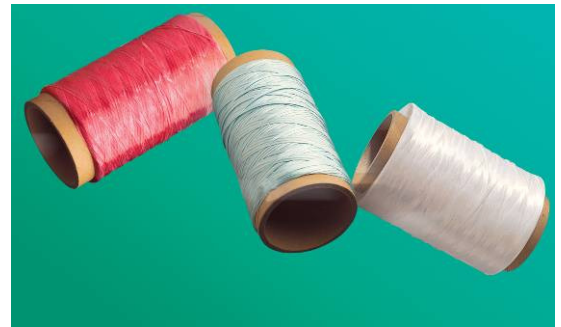

Thermoplastics for fibers and textiles

INEOS Olefins & Polymers' polyolefin fiber grades are formulated to provide exceptional performance in Fiber and Textile applications. Optimized for spun bonded, monofilament, multi-filament, staple fiber and slit tape processes, our polypropylene resins are used by market leaders in the production of carpet, fabric, woven bags, non-wovens and other textiles. Additionally, INEOS Olefins & Polymers provides a high density polyethylene resin specially designed for slit tape applications such as bale net wrap, where a balance of processability and mechanical properties is critical.

Contact a representative at INEOS Olefins & Polymers to discuss the product that best fits your application.

INEOS
Olefins & Polymers USA

Product offerings

Polypropylene				
Material	MFR ¹	Tensile ²	Elongation ³	Features/special characteristics
H03G-00	3.2	5,300	10	Low water carry-over resin for tape and fiber.
H03G-02	3.5	5,300	9.5	General Purpose.
H03W-00	3.5	4,600	9	Low water carry-over resin for woven bags, carpet backing and twine.
H03W-01	4.0	4,900	9	Low water carry-over resin for cordage, carpet backing, industrial fabrics and geotextiles.
H08U-00	8.0	5,000	9	High tenacity, UV stabilized fiber spinning resin for continuous filament fiber yarn and geotextiles.
H11G-00	11.0	5,400	8	General Purpose, continuous filament yarn.
H19G-00	19.3	5,200	9.5	Color stabilized resin for continuous filament fiber yarn and staple fibers.
H19G-01	19.0	5,250	9.6	Lightly stabilized resin for continuous filament yarn and staple fibers.
H36G-00	36.0	4,700	9	Designed for high speed fiber spinning and spun bonded applications such as filtration media and disposable fabrics and cloth.
H38G-02	38.0	5,000	9	Designed for the production of spun bonded nonwovens and Partially Oriented Yarn (POY) applications.

¹ g/10 min ASTM D 1238 (230 C, 2.16 kg).

² psi at Yield, ASTM D638, 23 C.

³ % at Yield, ASTM D638, 23 C.

Polyethylene			
Material	MI 5 ⁴	Density ⁵	Features / special characteristics
AF5006FN1280	1.9	0.944	This narrow molecular weight copolymer is specifically designed for tape production via cast and blown films processes.

⁴ g/10 min, ISO 1133, 190 C, 5 kg.

⁵ g/cc, ISO 1183/A, 23 C.

Product inquiries:

Marina View Headquarters
 2600 South Shore Blvd., Suite 500
 League City, Texas 77573
 Telephone: 281-535-6600
 Fax: 281-535-6764
 Customer Service: 800-527-5419

Battleground Manufacturing Complex
 1230 Independence Parkway South
 La Porte, Texas 77571
 Telephone: 713-307-3000
 Fax: 713-307-3521
 Technical Center: 800-338-0489

www.ineos-op.com

Exclusion of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. As conditions of use may vary and are beyond the control of INEOS Olefins & Polymers USA, no representations or warranty, express or implied, are made with respect to the accuracy, reliability, or completeness of the this information. This information in no way modifies, amends, enlarges, or creates any specification or warranty, and ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY EXCLUDED. INEOS Olefins & Polymers USA shall not be responsible for any damage or injury resulting from abnormal use, from any failure to follow appropriate practices, or from hazards inherent in the nature of the product and/or material, nor for toxicological effects or Industrial Hygiene associated with particular use of any product described herein. This information relates only to the specific product and/or material designated and may not be valid for such product and/or material used in combination with any other product and/or material or in any process, unless otherwise specified. This information shall not be construed as a recommendation for any use that may infringe any patent, trademark, or the like, or as an endorsement of any material, equipment, service, or other item not supplied by INEOS Olefins & Polymers USA.

The name and logo INEOS are trademarks of the INEOS Group and its affiliated companies and businesses.

INEOS
Olefins & Polymers USA