

**On-target products.
On-time delivery.**

**Service you
can count on.**

Our company


INEOS Olefins & Polymers USA, one of the world's largest polyolefin producers, provides customers with quality products and services from facilities that meet the highest Health, Safety, Security and Environmental (HSSE) standards. We are challenging ourselves to change the way our industry does business, and we are unleashing the potential of our people to provide our customers on-target products, on-time delivery, service you can count on.



Our products

INEOS Olefins & Polymers produces a full range of polyethylene and polypropylene resins for thermoforming applications. Our industry leading polymers are transformed into a wide

variety of thermoformed articles, including food and drink containers, medical, pharmaceutical and personal care packaging, truck bed liners and a variety of other applications.

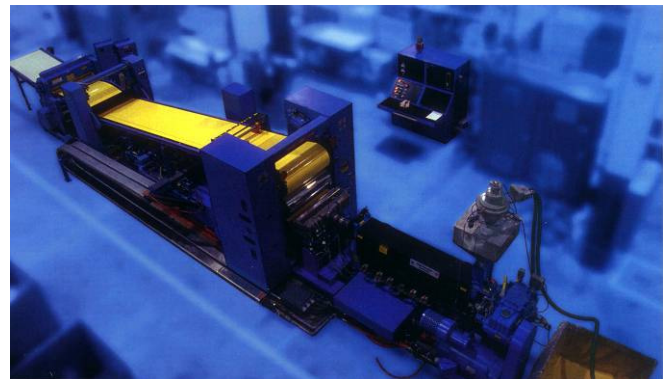

Thermoplastics for thermoforming

Developed in collaboration with leading packagers, our polyethylene grades feature excellent processability while retaining properties important to packagers such as high rigidity, enhanced impact strength and superior chemical resistance; our polypropylene grades feature low cycle times, an excellent balance of stiffness and impact properties, high clarity and excellent organoleptic characteristics.



Contact a representative at INEOS Olefins & Polymers to discuss the product that best fits your application.

INEOS
Olefins & Polymers USA

Product offerings

Polyethylene			
Material	MI ¹	Density ²	Features / special characteristics
G60-25-144	0.25	0.962	This homopolymer is typically used for the production of thin wall containers that require good rigidity.
G50-100	10*	0.950	High molecular weight resin optimized for sheet extrusion and thermoforming.

Polypropylene				
Material	MFI ³	Flex Mod ⁴	Izod ⁵	Features / special characteristics
R01C-00	1.9	145	9 Partial Hinge	This random copolymer is designed for thermoforming applications that require good see through clarity combined with good heat resistance and refrigerator impact.
R01C-01	1.9	145	8-10	Random copolymer designed for thermoforming applications that require good see through clarity combined with good heat resistance and refrigerator impact as well low plateout performance
N02G-00	2.5	195**	No Break	This high impact copolymer grade is specifically suited for sheet extrusion and thermoforming. It offers a superior balance of stiffness and impact energy as compared to competitive copolymers of similar melt flow rate.
H02C-01	2.3	240	0.6	This homopolymer is designed for thermoforming applications which require high clarity, stiffness and good heat resistance.
H02G-00	2.8	175	-	This general purpose homopolymer resin is used for the production of thin wall, deep draw containers.

Experimental and Developmental Grades

Polypropylene				
Material	MFI ³	Flex Mod ⁴	Izod ⁵	Features / special characteristics
N02Cx11	2	130 - 140	9 - 12 Partial Hinge	This developmental grade features improved clarity and impact properties and is intended for use in freezer to microwave application where see through clarity is required.
38/39	2 - 3	130 - 140	5 - 7 Partial Hinge	This developmental grade features improved clarity and impact properties and is intended for use in freezer to microwave application where see through clarity is required.

*Indicates HLMI (MI 190/21.6) measurement

¹ g/10 min ASTM D 1238 (190/2.16)

² g/cc

³ g/10 min ASTM D 1238 (230/2.16)

⁴ kpsi ASTM D 790 (1% secant, 0.05 in/min)

⁵ ft-lb/in ASTM D256 (Room Temperature)

**kpsi ASTM D 790 (1% secant, 0.5 in/min)

Product inquiries:

Marina View Headquarters

2600 South Shore Blvd., Suite 500

League City, Texas 77573

Telephone: 281-535-6600

Fax: 281-535-6764

Customer Service: 800-527-5419

Battleground Manufacturing Complex

1230 Independence Parkway South

La Porte, Texas 77571

Telephone: 713-307-3000

Fax: 713-307-3521

Technical Center: 800-338-0489

www.ineos-op.com

Exclusion of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. As conditions of use may vary and are beyond the control of INEOS Olefins & Polymers USA, no representations or warranty, express or implied, are made with respect to the accuracy, reliability, or completeness of this information. This information in no way modifies, amends, enlarges, or creates any specification or warranty, and ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY EXCLUDED. INEOS Olefins & Polymers USA shall not be responsible for any damage or injury resulting from abnormal use, from any failure to follow appropriate practices, or from hazards inherent in the nature of the product and/or material, nor for toxicological effects or Industrial Hygiene associated with particular use of any product described herein. This information relates only to the specific product and/or material designated and may not be valid for such product and/or material used in combination with any other product and/or material or in any process, unless otherwise specified. This information shall not be construed as a recommendation for any use that may infringe any patent, trademark, or the like, or as an endorsement of any material, equipment, service, or other item not supplied by INEOS Olefins & Polymers USA.

The name and logo INEOS are trademarks of the INEOS Group and its affiliated companies and businesses.

INEOS
Olefins & Polymers USA